




PLAN VIEW

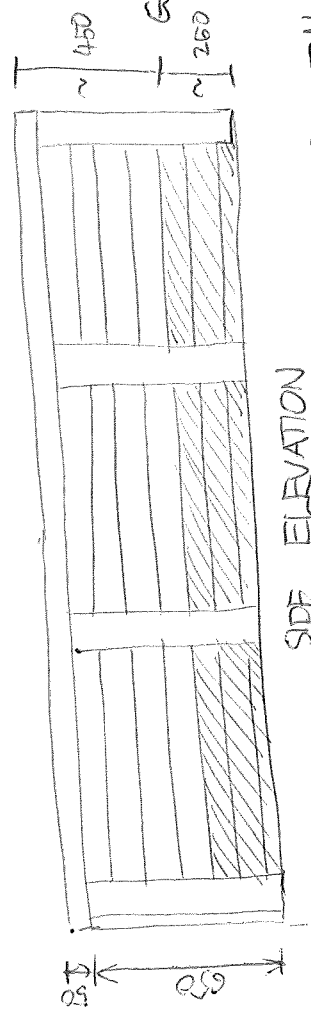

SIDE ELEVATION

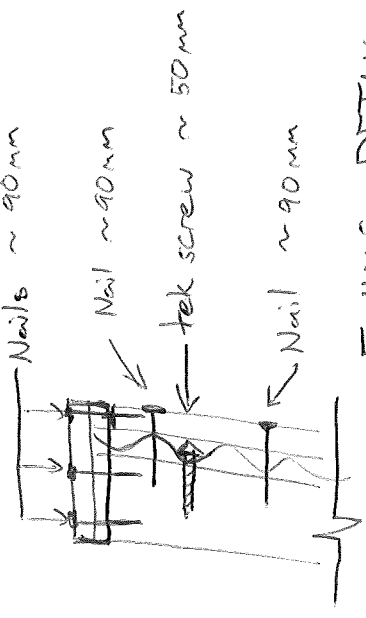

FIXING DETAIL

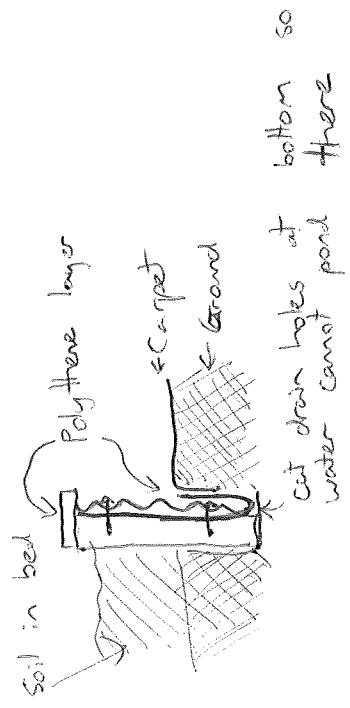

- Corrugated iron fastened to outside of posts with roofing screws. Corners finished boards.
- Posts 100 x 100
- Boards 25 x 100 (optional, esp. over posts not at corners)
- Top planks 150 x 50
- Nail through top planks down into post tops & corner board ends.
- Height 650 (Corrugated iron width)
- Assembled above ground then placed into trench with level base (top planks can be left off until in-situ.)
- Corrugated iron wrapped in polythene where in contact with soil.

- ~~Corner~~ posts also in polythene to prevent contact with soil.
- Trench filled in. Carpet ground beds to suppress weeds can also have edge buried

Quantities

- Posts 10 @ 650mm = 6.5m
- Planks 2 @ 3300mm } = 10.8m
- 2 @ 2100mm }
- Boards 8 @ 650mm = 5.2m
- 6 @ 650mm = 3.9m (optional)
- Steel (Can be overlapped) 10.8m (Corr. Iron)
- Tek screws x 42 Nails ~ 200

Take Roos 9-5-15
Not to Scale.

RAISED BED DESIGN V.1
Matai Community Garden